

Zeller Integration (Direct)

Zeller Direct integration

ESTIMATED TIME 20 minutes

Connecting a Zeller terminal directly means card payments go from PowerEPOS to the terminal on their own, and the result comes back into the sale. There are two halves to it: activating Zeller as the credit card provider in System Manager, and pairing the physical terminal with the POS. Neither works without the other.


Before you start

- PowerEPOS 2026.5.7.5 or newer.
- An active Zeller account and at least one Zeller terminal.
- Your payment types configured in PowerEPOS, if you plan to map card types to particular payment types.
- The Zeller terminal switched on, connected to Wi-Fi or mobile data, and signed in to your Zeller account.

Activating Zeller in System Manager

1 Open the POS terminal

In System Manager, go to **System** and select the POS terminal that will use the Zeller integration.

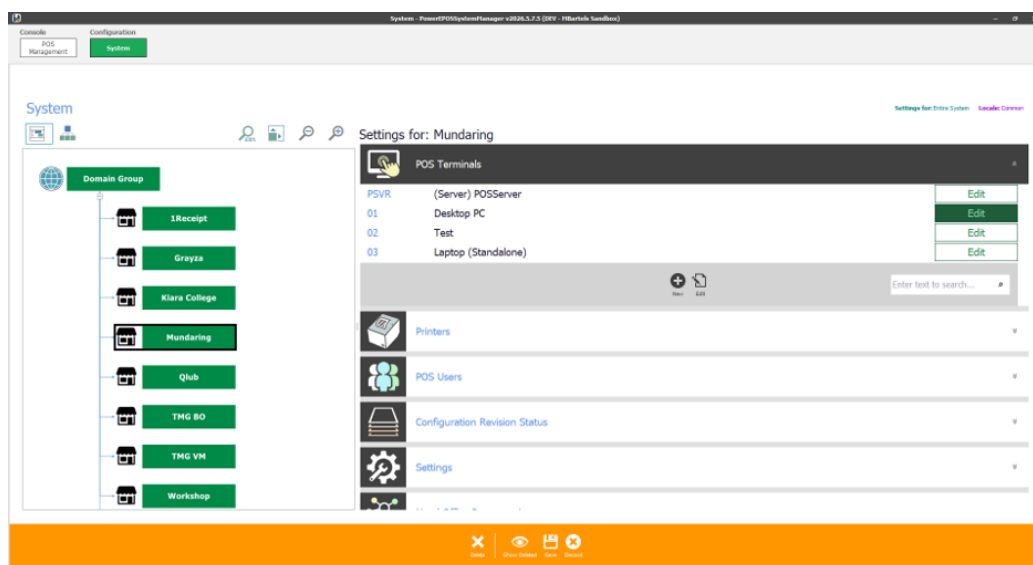

2

Set the credit card provider

Open the **Credit Card** tab and set **Credit Card Provider** to **Zeller**.


Adjust the interface settings if you need to, or leave the defaults. To combine card types into a single total, point each option at a payment type you have already set up under **Payment Types**. Select **Save** when you are done.


Setting	Value
[Shared] Vendor Name	PowerEPOS
[Shared] Surcharge Type	[Automatic]
[Shared] Default Payment Type	Eftpos
[Shared] OTHER maps to	[Automatic]
[Shared] EFTPOS maps to	[Automatic]
[Shared] MASTERCARD maps to	[Automatic]
[Shared] VISA maps to	[Automatic]
[Shared] AMEX maps to	[Automatic]
[Shared] DINERSCLUB maps to	[Automatic]
[Shared] JCB maps to	[Automatic]

3

Check the payment button

Before publishing, make sure the POS touchscreen has a credit card payment button. Open the **Touchscreen Editor** and load your payment page.

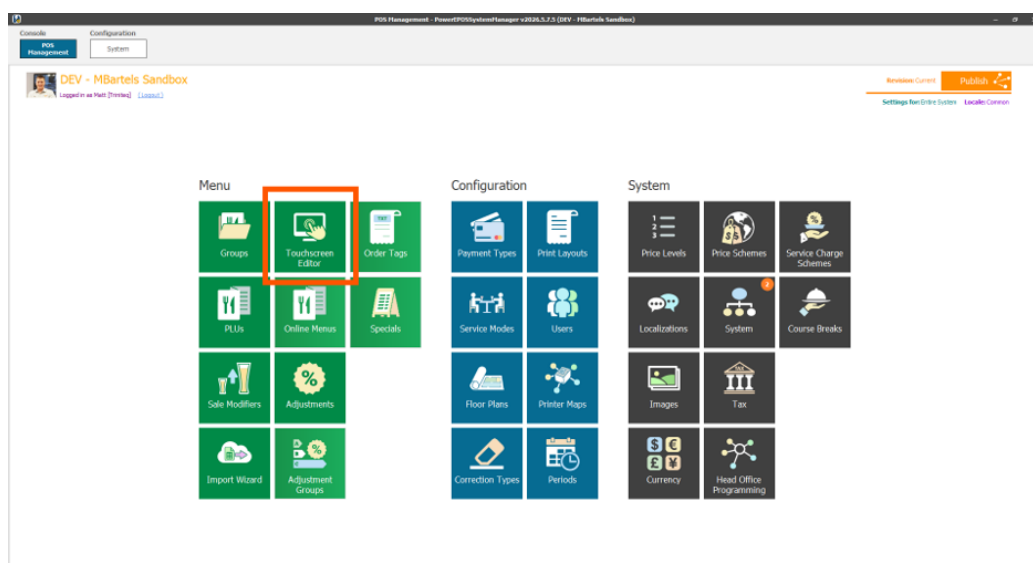

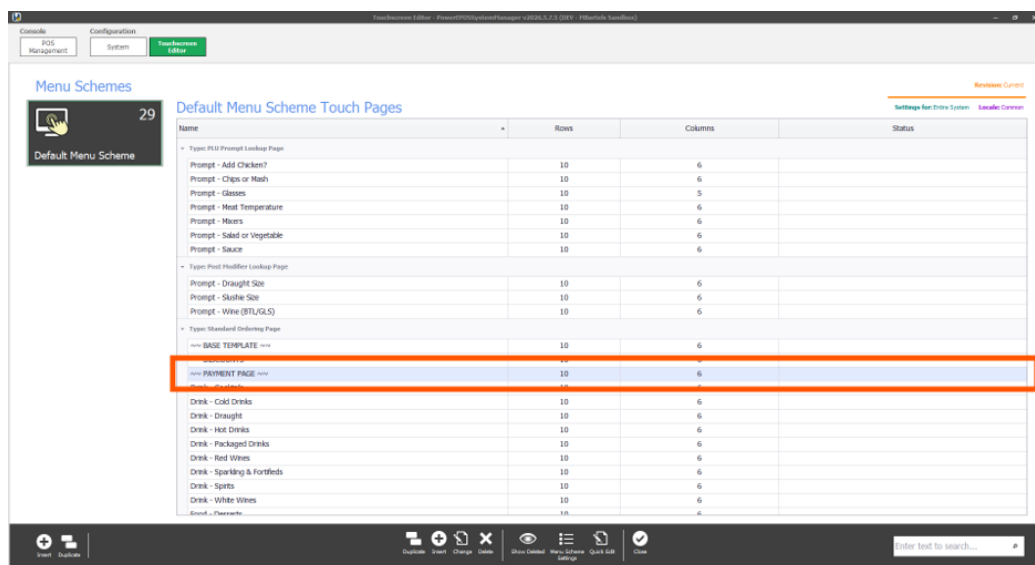


4

Set the button type

Select the payment or EFTPOS button and set its type to **Credit Card Payment Key**. Leave **Card Present Status** on its default, *Card is present*.

To allow manual card entry as well, add a second button with the Card Present Status set to *Not present*.

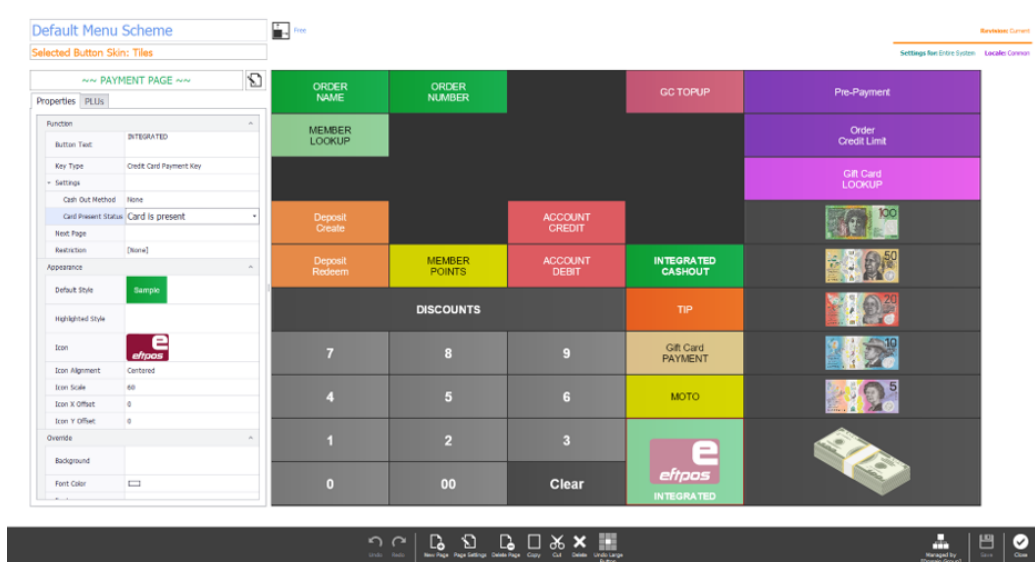


NOTE No cashout

Cashout is not currently supported by Zeller.

5

Save and publish

Save your changes and publish them, to push the configuration out to the POS in the venue.

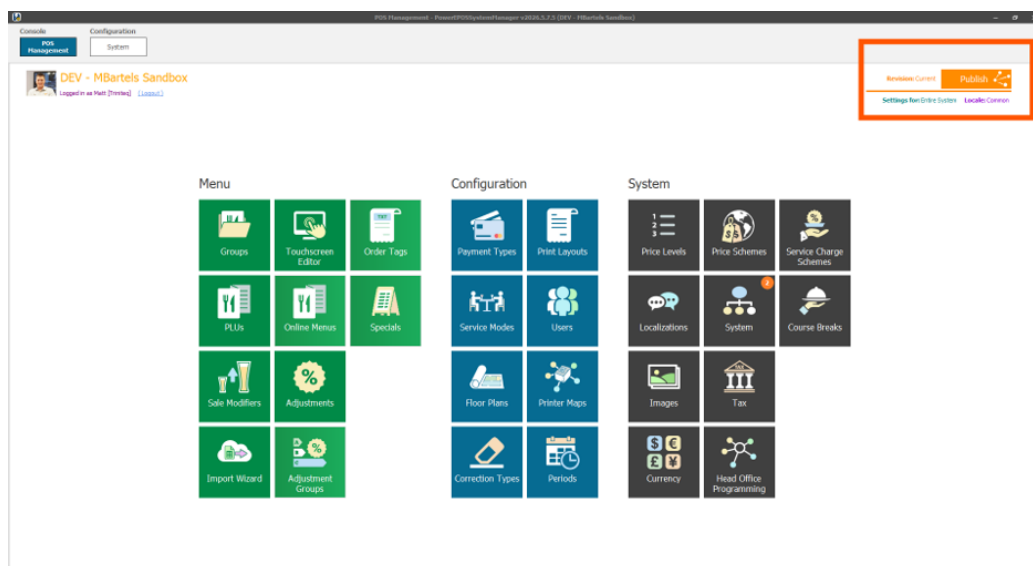



Pairing the terminal

6

Open Credit Card Pairing


In PowerEPOS, go to **Reports** → **Credit Card Pairing**, entering your user PIN if you are asked for it. The Zeller setup screen appears.

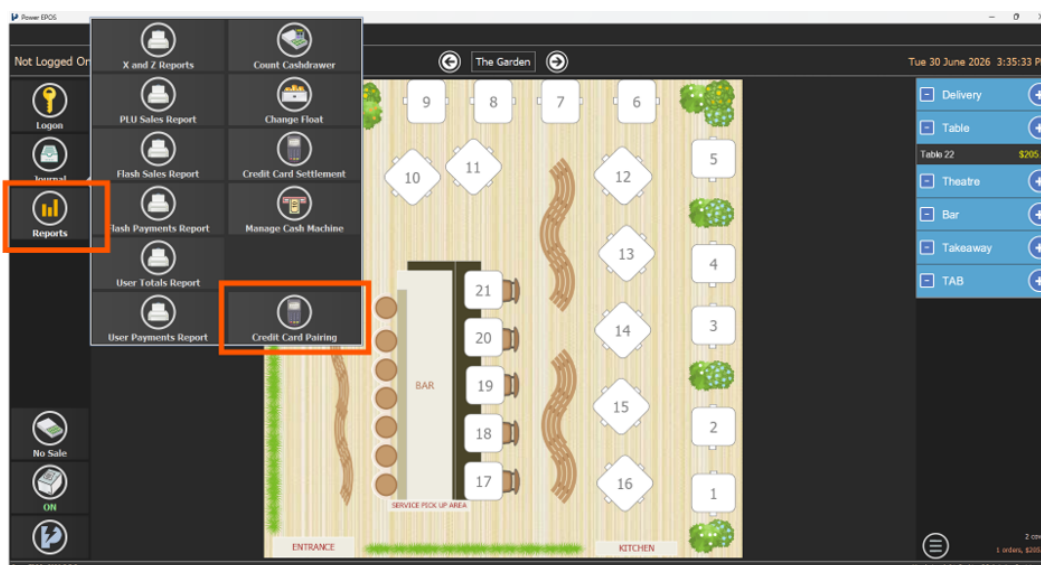

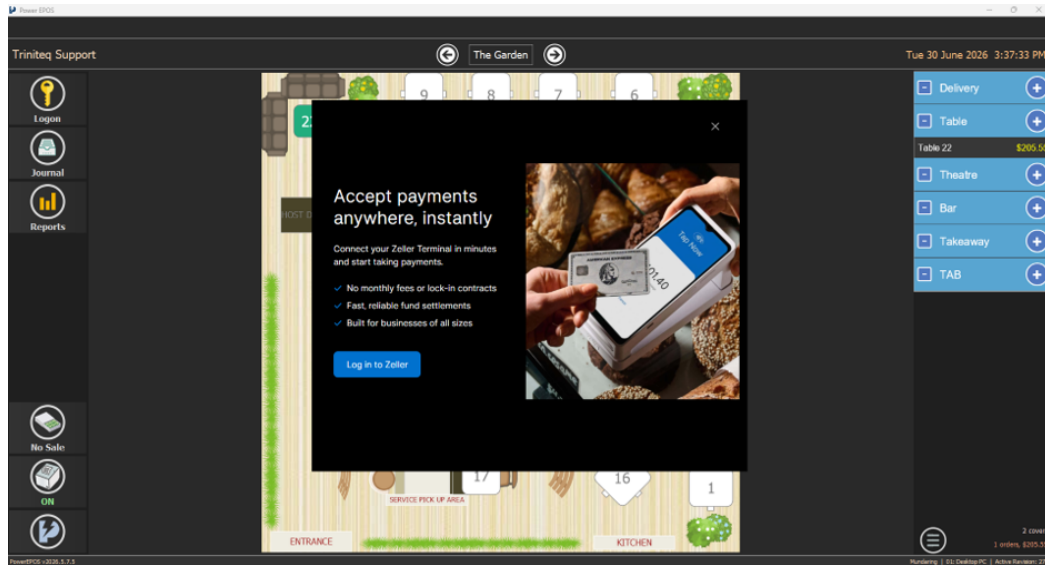

7 Sign in to Zeller


Select **Log in to Zeller** and enter your Zeller email and password.

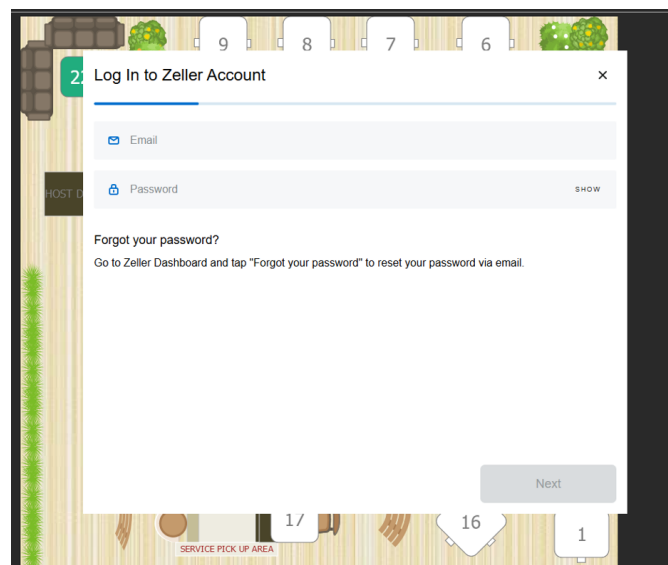

8

Name the device


Give the device a name. Using the same name as the POS terminal makes reporting much easier later — the POS device name is in the bottom-right corner of PowerEPOS.

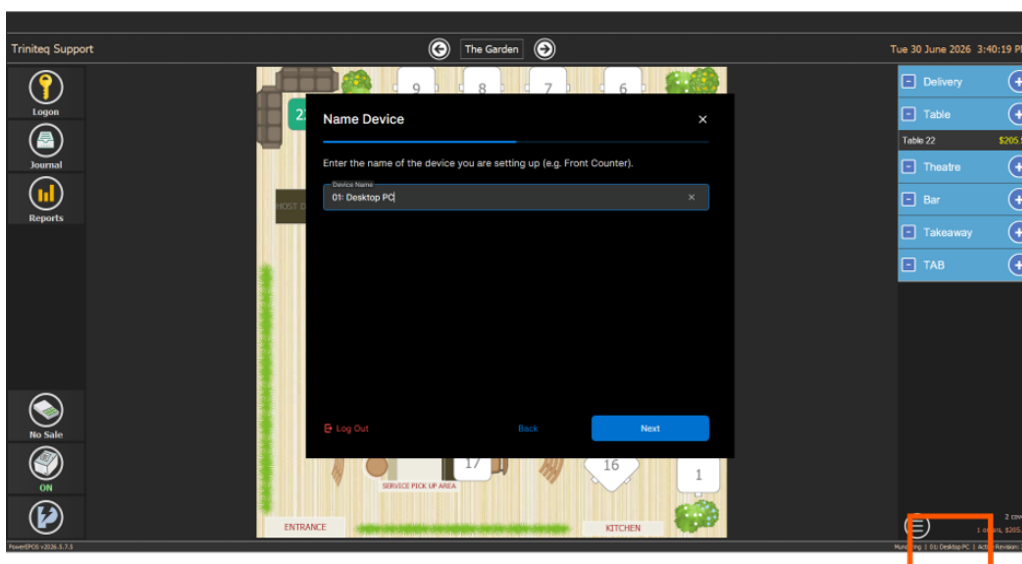

9

Pick the terminal and finish

Select the Zeller terminal to pair with this POS. When pairing is done, close the window with the ✕ at the top right. The POS can now take integrated card payments.

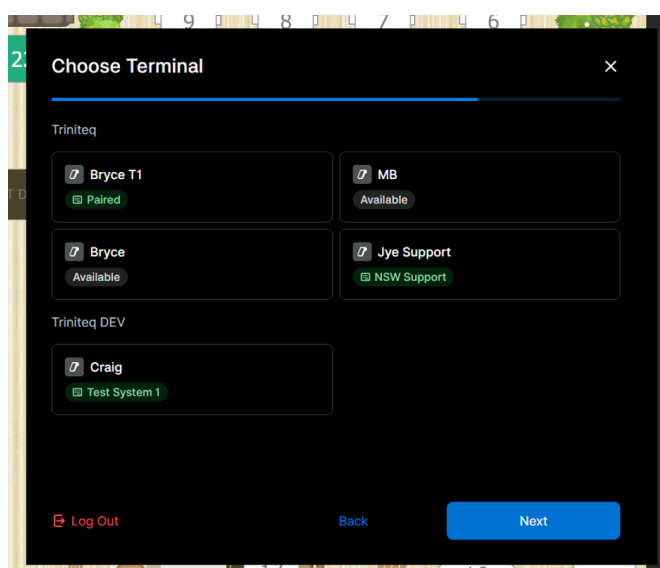

10

Need a hand? Contact Triniteq Support

NEED A HAND? CONTACT TRINITEQ SUPPORT

Phone **1300 784 276**

Email **support@triniteq.com**

Our support team is here to help.